

# Forest Fire Spread and Suppression in DEVS

Lewis Ntaimo<sup>1</sup>, Bithika Khargharia<sup>2</sup>, Bernard P. Zeigler<sup>2</sup>, Maria J. Vasconcelos<sup>3</sup>

<sup>1</sup>Department of Systems and Industrial Engineering  
The University of Arizona  
1127 E. North Campus Drive, Tucson, AZ 85721.

<sup>3</sup>Tropical Research Institute  
Travessa do Conde da Ribeira 9  
1300-142 Lisbon  
Portugal.

<sup>2</sup>Arizona Center for Integrative Modeling and Simulation  
Department of Electrical and Computer Engineering  
The University of Arizona  
1230 E. Speedway, Tucson, AZ 85721.

Correspondence E-mail: [ntaimo@email.arizona.edu](mailto:ntaimo@email.arizona.edu)

## Abstract

*In this paper we discuss modeling and simulation of forest fire spread and suppression using the discrete-event specification (DEVS) cellspace approach in DEVJAVA. Our event-based modeling approach enables efficient simulation of cell space and allows us to obtain timely simulation-based predictions of forest fire spread and suppression in uniform and non-uniform environmental conditions. Our model represents an advance toward developing a real-time decision support simulation system for predicting forest fire spread and the effects of water-based suppression attempts.*

## 1. Introduction

Wildfires have become ever more destructive throughout the world and the prospects are unfortunately that this trend will continue. Greater attention must be focused on the underlying causes, the effect of land management on fire ecology, wildfire risk, the dynamics of vegetation fuel, and how to reduce the likelihood of catastrophic fires [1]. Forest fires destroy important resources such as plant life, animal life, houses, and other civil infrastructures every year. “Strategic” planning attempts to avoid the large losses and suffering associated with wild fires by trying to prevent fire outbreaks. However, once a forest fire has started, a real-time simulation system for accurately predicting where and how fast the fire will spread would assist at the “tactical” level to effectively bring it under control. Furthermore, such a system would allow for ample warning to be given to the people living in the predicted path of a fire, thus enabling a well-coordinated evacuation plan. Important resources would be saved from destruction by effective fire suppression and would save a lot of money and time involved in fighting forest fires and in evacuating people.

The long term goal of this work is to develop a simulation tool that can be used in real-time or as-fast-as-can tactical decision making to aid in forest fire control and suppression. Toward that objective, the research reported here is to develop a cellular discrete event system specification or DEVS model [2, 3] of forest fire spread that includes response to control measures. DEVS provides a sound modeling and simulation framework and is derived from mathematical dynamical system theory [2]. It supports hierarchical, modular composition and reuse and can express discrete time, continuous and hybrid models. DEVS allows for the construction of a hierarchical simulation model composed of atomic and coupled models. Each standalone atomic model is assigned to an atomic simulator and atomic models as components within coupled models are assigned to a coupled simulator. Coupled models are assigned to coordinators while coupled models as components within larger models are assigned to coupled coordinator simulators. The simulators keep track of the events and execute the simulation model defined methods based on the events list.

The key feature of the DEVS modeling approach we seek to exploit is its ability to effectively represent large spatial dynamic phenomena for efficient simulation [4, 5, 6]. Unlike simulations that are based on cellular automata, in which all cells perform computations at every time step, the cellular DEVS approach allows computations to occur only in active cells, thus enhancing simulation performance. Our approach differs from the other cellular DEVS approaches (e.g. [3,

5]) mainly in the way we exploit the fact that computations are concentrated on the cells along the fire-front and optimize the forest cell space for improved simulation performance [7]. We use DEVSJAVA [8] a Java based modeling and simulation software implementation of the DEVS formalism. The idea of improving the cell space in cellular-based simulations is found in [9] who apply the Multicomponent Discrete Time System Specification (MultiDTSS) formalism to a fire spread model. In the DEVS abstract simulation protocol the number of *imminents* (those components for which there are internal transitions scheduled at the next event time) determines the amount of processing in each simulation cycle. In a DEVS forest fire model the cells along the fire front (active cells) represent most of the imminents. Therefore, our DEVS simulation engine takes advantage of the small number of *imminents* to decrease simulation time significantly.

Our model predicts fire spread (speed and direction) as the fire propagates based on both static and dynamic conditions. The vegetation and topographical conditions are assumed to be uniform across a cell while the weather conditions are allowed to be dynamic. The model considers non-uniform fire spread parameters in order to address the issue of spatial (temporal) variability of the variables. It follows along the line of work of [10] that introduced and illustrated the conceptual basis for a discrete-event hierarchical modular fire spread model, and covers a variety of issues in forest fire simulation and modeling in general.

The contribution of this paper includes the development and implementation of a dynamic forest fire spread simulation model that represents an advance towards improving simulations of forest fire spread with innovations in the way the process is represented, implemented and optimized. In addition, we incorporate into our simulation model simple rules for fire fighting that are derived from well accepted rules of thumb for fire suppression. This allows our model to provide important information needed in tactical decision making for forest fire control and suppression.

This paper is organized as follows. In Section 2 we provide basic concepts and develop our dynamic forest fire model. In particular we derive and state cell space model rules and fire suppression rules. In Section 3 we present the simulation model as represented in DEVSJAVA, discussing the system hierarchical structure through hierarchical diagrams and give detailed explanation of the model's operation. The experimental frame and how it serves to achieve the goals of the simulation are discussed in Section 4. In Section 5 we report our simulation experimental results and in Section 6 we conclude and give some future directions. A more detailed explanation of the cell's transition functions is given in the Appendix.

## 2. Dynamic Forest Fire Model Conceptualization

In this section we give a general description of the conceptualization of a dynamic forest fire spread model and provide rules for optimizing the cell space. We model a forest as a two-dimensional cell space composed of individual forest cells with uniform vegetation, environmental, and topographical conditions across each cell. We capture the complex behavior of forest fire spread by allowing each forest cell to be represented as a “cell” in the simulation that performs its local fire spread computations based on a given fire spread model and exchange messages with its neighbors. DEVSJAVA allows us to represent forest cells as atomic models with input and output ports between neighboring cells and enables message exchanges to occur on the ports. A forest cellspace is composed of a number of forest cells and constitutes a coupled model.


Here we distinguish between two types of *cells*. We have *static* grid cells representing space and stored in the environmental database and *model/simulation* cells. The static grid cells are external to the simulation and represent environmental conditions and fire position while the dynamic cells are simply an abstraction of the forest cell and are represented in DEVSJAVA. Graphically and database-wise, all static cells of a given space of concern are always present and represented in the database, and could be designated by geographical units. However, the cells internal to DEVSJAVA in the software are created at initialization and this is where the burning process is computed. In particular, we model fire spread in each cell according to Rothermel’s [11] stationary model, which is a one-dimension semi-empirical model. We obtain the second dimension by applying a propagation algorithm that uses maximum rate of spread and wind and slope factors. We allow the behavior of a burning cell to be influenced by external inputs from neighboring cells as well as changes in weather conditions. In addition, we incorporate uncertainty in our model by allowing certain critical parameters to be sampled from arbitrary probability distributions during the simulation run if those parameters cannot be determined with certainty. Next we provide the forest fire spread model concepts.

### 2.1 Basic Model Concepts

#### 2.1.1 Cell Description

We represent a forest as a two-dimensional cell-space composed of cells of dimensions  $l \times b$ , where  $l$  and  $b$  is the length and breadth of the cell, respectively. For each cell we define fixed

major spread directions (propagation lines) N, NE, E, SE, S, SW, W, and NW as shown in Figure 1. This allows for the computation of fire spread in only the specified major directions instead of all directions and thus, significantly reduces fire spread computation time.

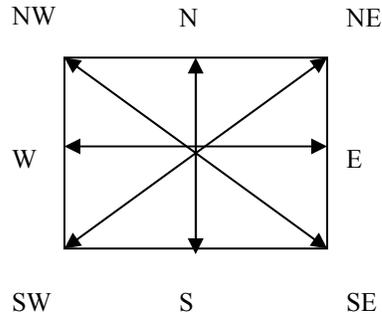

**Figure 1. Cell with major spread directions**

These directions correspond to an azimuth (degrees measured clockwise from the north) of 0, 45, 90, 135, 180, 225, 270, and 315 degrees, respectively. The definition of a cell in this way is the same as that of [10] and [5] among others.

### 2.1.2 Fire Spread

Fire spread is the propagation of a flaming front that constitutes a series of ignitions with the heat of the fire raising successive stripes of fuel to ignition temperature via a contagion process that is a steady-state process for homogeneous fuels and unsteady for nonhomogeneous fuels [11, 12]. The behavior of the fire spread is controlled by the following factors: the *fuel type* (particle size and array in the fuel bed, chemical composition, and fuel moisture content), *weather conditions* (ambient temperature, air humidity, wind speed and direction) and *topography* (mainly slope) of the fire location.

In our model fire spread is computed along the major wind directions based on Rothermel's [11] semi-empirical model for uniform fuels. Given a cell and its forest fuel model type and environmental parameters (slope, wind speed and wind direction) Rothermel's model computes the maximum fire spread and the corresponding direction of spread. Fire spread is given in meters per second (m/s) and the direction is given in degrees (0-360 degrees clockwise from uphill). Once the maximum *fire spread* and *direction* are known, we decompose the fire spread in a cell in the major spread directions using a model that defines fire shape as an ellipse and is proposed by [13] and [14]. The same idea is implemented in [5]. Given the computed rate of spread in

each of the eight directions for a given cell, the time it takes for the fire to spread from the center of the cell to the center of the neighboring cell is computed based on the distance between the cell centers. The computed times provide the spread time delays in the major spread directions for each cell. The direction with the minimum fire spread gives the maximum spread time delay for that cell.

The wind speed and direction for each cell are assumed to be available from a meteorological station closest to the forest fire that provides the current wind speed and direction as the fire advances. However, the wind flow at a certain site is strongly influenced by the surrounding terrain and topography elements. We therefore assume that a wind flow model is available to capture the variability of the wind speed and direction due to complex terrain and computes the effective wind speed in each cell. An example of a wind flow model is given by [15]. In our simulation model we allow for varying wind speed and direction in each cell in order to approximate reality more closely. The wind speed and direction are updated during the simulation run if a significant change in the mean wind speed and direction is detected.


### 2.1.3 Fireline Intensity

We use *fireline intensity* ( $I$ ) to determine if a cell is burnable or not. Fireline intensity is the product of the available heat of combustion per unit area of ground and the rate of spread of the fire [16] and is given by  $I = hwR$ , where  $h$  is the heat yield in kJ/kg,  $w$  is the fuel consumption in kg/m<sup>2</sup>,  $R$  is the rate of spread of the fire in m/sec, and  $I$  is given in kW/m. Fireline intensity is computed based on fuel loading and fuel moisture conditions for surface fire behavior [11, 17]. We allow cells to compute their fireline intensity values and only cells with intensities greater than 45 kW/m (13 BTU/ft sec) are considered burnable. This follows after [18] who have determined this value for fire regimes in Sierra Nevada. In the next subsection we describe the cell states and cell state transitions.

### 2.1.4 Cell States and Cell State Transitions

In order to model fire spread in DEVJAVA, we make an abstraction from the actual forest cell to a “forest cell” in DEVJAVA that can be in only one state at any time. We define the following six “dry” and “wet” states: *unburned*, *burning*, *burned*, *unburned-wet*, *burning-wet*, and *burned-wet*. Initially, all the cells are in *unburned* state (passive state) with their current intrinsic vegetation and environmental conditions given. A cell that transitions into *unburned\_wet*,

*burned*, or *burned-wet* stays in this state for the duration of the simulation (absorbing state). The forest cell state transitions occur as shown in Figure 2.

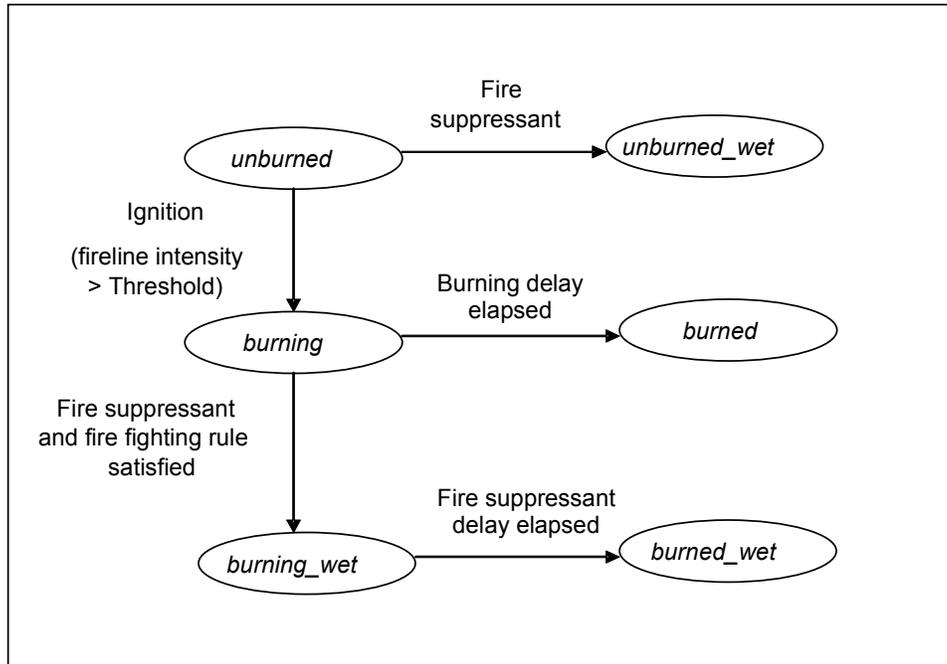

**Figure 2. Forest Cell State Transitions**


A cell in *unburned* state will remain in this state forever unless it is either ignited or fire suppressant (or water) is poured on the cell. A cell in the *unburned* state transitions to the *burning* state (active state) if it is ignited and the computed *fireline intensity* value for the cell is above the *threshold* value given in the previous section or one determined experimentally for the fuel model. Otherwise, if fire suppressant is poured on cell in the *unburned* state the cell immediately transitions to the *unburned* state. Once in the *burning* state a cell transitions to the *burned* when all the eight time delay components have elapsed. Otherwise if fire suppressant is introduced into a cell that is in the *burning* state it transitions to *burning\_wet* if some fire fighting rule is satisfied as described in Section 2.3. It stays in this state for a delay that is computed based on the fire fighting scenario for that cell and then transitions into the *burned\_wet* state. A cell in any wet state does not propagate fire.

A cell in a given dry state transitions to the corresponding wet state if fire suppressant is poured on the cell and the flame length (or *fireline intensity*) for that cell is in a given range based on the fire suppression rules defined in Section 2.3. Otherwise, the cell stays in the dry state. This allows us to model fire fighting influence (or rain) on the model using simple fire suppression

rules. Ameghino et al. [5] also uses simple rules to study the effect of rain on fire spread. Their model assumes that a fire would take 16 minutes to extinguish in stages of different length. In our model we implement simple fire suppression rules based on flame length or fireline intensity as given by the general reliable rules for fire suppression [12, 19].

## 2.2 Cell Space Model Rules


In the model each cell has eight neighbor cells *N*, *NE*, *E*, *SE*, *S*, *SW*, *W*, and *NW* neighbors as shown in Figure 3 except the boundary cells. In addition, there is an *igniter* atomic model that is linked to all the cells and randomly (or deterministically) selects a cell to ignite at some given time (for example at the beginning of the simulation run).

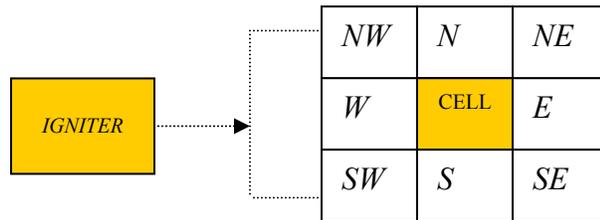

**Figure 3. A two-dimensional cell space.**


We now define the model rules as follows:

1. A cell starts to burn if:
  - a) A cell is ignited by the *igniter* atomic model if its fireline intensity is above the threshold. Otherwise, it remains in the *unburned* state. If it is ignited, the cell starts to burn at the center and the fire spreads in the major directions towards the center of each neighbor cell as shown in Figure 4.

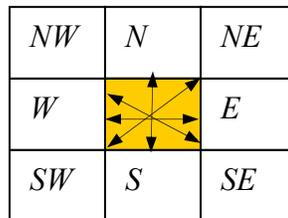

**Figure 4. Fire spread directions after ignition by the *igniter* module**

A cell is ignited by the fire from the neighbor cell if the cell's *fireline intensity* is above the threshold defined earlier. Similarly, once the cell starts to burn the fire immediately starts to spread along the eight major spread directions. A neighbor cell has the potential of being ignited by the fire spread component in the direction of the cell (see Figure 5 below).

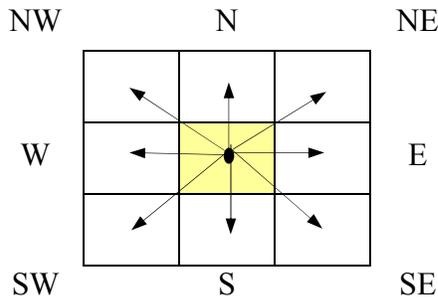

**Figure 5. Potential neighbor cells to ignite by fire from center cell.**

2. A cell burns completely when all the fire spread components associated with the cell reach the neighboring cell centers. In terms of simulation, the state change from ‘*burning*’ to ‘*burned*’ will occur after the maximum spread time delay for that cell has elapsed.
3. If a cell that is burning but not completely burned receives another input from a neighbor cell, the input is simply ignored. However, if there is a change in the wind speed and direction, then the cell re-computes the rate of spread based and updates its time delays based on the associated remaining distance to reach the neighboring cell center. This facilitates for real time simulation in which weather conditions are updated periodically during the simulation. The time delay updates apply only to spread components whose time delays are greater than zero. Otherwise, any spread component with time delay equal to zero would have burned out some time in the past.
4. When water is poured on the cell, the cell takes a random time to transition to the corresponding wet state according to simple fire suppression rules.
5. The local computing function takes into account the following parameters as required by Rothermel’s model:

- a) Cell forest fuel model
- b) Cell field topography (mainly slope)
- c) Wind speed and wind direction
- d) Cell conditions, wet, dry, humidity and ambient temperature.

The first two properties are assumed to be uniform for each cell but the wind speed and wind direction are assumed to be determined from a wind flow generation model given the mean values from the nearest meteorological station. The wetness conditions are also assumed to be available from some water source such as a fire suppression water source or rain.

### 2.3 Fire Suppression Rules

To allow our forest fire spread model to handle fire suppression scenarios, we implement simple fire suppression rules based on flame length or fireline intensity as given by the general reliable rules for fire suppression [12, 19]. First, we assume that suppressing fire in a given cell that is in the *burning* state would take at most the time remaining for that cell to transition into the *burned* state. Therefore, we can define a nonnegative random variable  $\alpha_i$  as the fraction of the remaining time for a cell to transition from *burning* to *burned* state at the instant fire suppression is initiated for fire fighting scenario  $i$  ( $i = 1, 2, 3, 4$ ). We assume that  $\alpha_i$  is either given or randomly determined. We now state fire suppression rules for the cases  $i = 1, 2, 3$ , and 4 as follows:

1. If the flame length in a given cell is less than 1.2 meters :
  - a. Fires can generally be attacked at the head or flanks of the fire by persons using hand tools.
  - b. Handlines should be adequate to hold the fire.

In this case our model assumes that  $0 \leq \alpha_1 \leq 1$  and the fire in the cell can be extinguished. A value of  $\alpha_1 = 0$  means that the fire is put out instantly when fire suppressant is poured on the cell while  $\alpha_1 = 1$  means that fire is put out at the instant the cell burns out.

2. If the flame length is between 1.2 meters and 2.4 meters:

- a. Fires are too intense for direct attack at the head of the fire by persons using hand tools.
- b. Handline cannot be relied upon to hold the fire.
- c. Equipment such as bulldozers, pumpers, and retardant aircraft may still be effective.
- d. Fires are potentially dangerous to personnel and equipment.

In this case we similarly we assume that  $0 \leq \alpha_2 \leq 1$  and the fire in the cell can be extinguished. A value of  $\alpha_2 = 0$  means that the fire is put out instantly when fire suppressant is poured on the cell while  $\alpha_2 = 1$  means that fire is put out at the instant the cell burns out. Due to the increased flame length and fireline intensity in this fire fighting scenario, we assume that  $\alpha_2 \geq \alpha_1$ .

3. If the flame length is between 2.4 meters and 3.4 meters:

- a. Fires may present serious control problems, such as torching out, crowning, and spotting ahead.
- b. Control efforts at the head of the fire probably will be ineffective. Indirect attack is probably the only means of suppression. Equipment such as bulldozers, pumpers, and retardant aircraft may still be effective.
- c. Fires are definitely dangerous to personnel and equipment.

In this case our model assumes that a fire cannot be extinguished by direct attack except by pouring fire suppressant on the forest cells before they catch fire.

4. If the flame length is greater than 3.4 meters:

- a. Crowning, spotting, and major fire runs are probable.
- b. Control efforts at the head of the fire are ineffective by any known means of suppression. Indirect attack and tactical counterfiring may be the only means to slow the spread of the fire in certain directions.
- c. Fires are extremely dangerous to personnel and equipment in the immediate vicinity of the fire.

Like in the previous case our model assumes that a fire would not be extinguished by direct attack except by pouring fire suppressant on the forest cells before they catch fire.

We assume in general that an unburned cell in the wet state will never burn and will stay in this state for the duration of the simulation. The model rules are by no means complete and it is up to the experimenter to modify these rules based on the availability of knowledge on fire suppression. Here we simply provide some basic rules that one can extend in order to gain more insight into fire suppression modeling.

In our simulation experiments in Section 5 we generate the values of  $\alpha_i, i = 1, 2, 3,$  and 4 by sampling from a random distribution due to lack of real experimental fire suppression data. In particular we arbitrarily sample from the uniform distribution with  $\alpha_1 = \text{uniform}(0, 0.5)$  and  $\alpha_2 = \text{uniform}(0.5, 1.0)$ .

### **3. Simulation Model**


In this section we present and describe the system entity structure and give the hierarchical diagrams of the overall structure of the simulation model. We also explain how the cell space is optimized for better simulation performance and provide implementation details and explanation of operation of the simulation.

The DEVS cellspace approach allows us to define a two-dimensional cell-space with individual cells representing the smallest physical forest unit whose vegetation properties remain uniform but the environment properties are allowed to be dynamic. The objectives of the modeling and simulation study are to model and simulate forest fire spread under dynamic and non-uniform conditions using the DEVS cellspace approach with an emphasis on simulation efficient performance. We employ local computing in each cell to determine the fire spread for that cell based on the vegetation and current environmental conditions.

The advantage of using the DEVS cellspace approach is that the model allows computation and transmission of messages only in active cells, thereby enhancing the efficiency of the simulation. In addition, we design a conceptual simulation model architecture that allows cells to be dynamically created and deleted as necessary during the simulation run. By coupling together simple cells with independent local behaviors we are able to build a complex system that allows dynamism and uncertainty to be added to the model. This also enables us to capture the complex relationships among vegetation, topography and meteorology that result in highly heterogeneous environmental conditions for the spread of forest fires.

### 3.1 System Entity Structure

The overall system structure for the forest fire spread simulation model is hierarchical and is given in Figure 6. The *realDevs* and *viewableDigraph* classes are already available in the DEVSJAVA package.

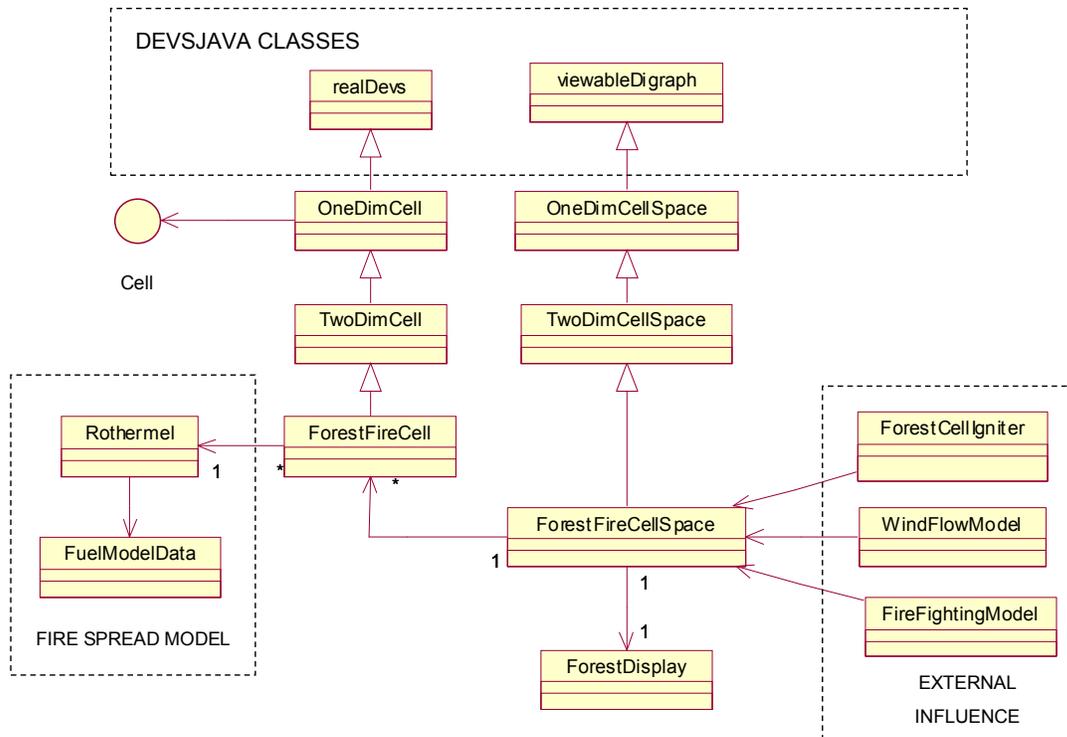

**Figure 6. Overall system entity structure.**

The *Rothermel* class is actually a JAVA package called BEHAVE that implements Rothermel model [11, 17] for computing fire spread and is freely available on the web at (<http://www.geo.unizh.ch/gis/research/edmg/fire/unc.html>) together with data for the 13 different forest fuel models as defined by NFFL. We used this package in our simulation model for computing fire spread. The BEHAVE model takes in the fuel model, topographical conditions (mainly slope) and weather conditions as input values and computes among other things the rate of spread, fireline intensity, and heat released per unit area for a particular homogeneous area (forest cell) in the landscape.

We developed and implemented all the other classes shown in the diagram. The *TwoDimCell* class is implemented by inheriting from the *OneDimCell* class that implements the *Cell* interface.

This class has a method for doing cell neighbor-to-neighbor coupling and has additional ports to the *cell* interface as needed for the forest fire model. Similarly, the *TwoDimCellSpace* class is implemented by inheriting from the *OneDimCellSpace* class, which is inherited from the DEVSJAVA class *realDevs* that handles atomic and coupled models that exchange real values.

The *ForestFireCellSpace* inherits the *TwoDimCellSpace* and is composed of several *ForestFireCells* coupled together according to the *TwoDimCellSpace* neighbor-to-neighbor coupling rules as describe below. The *TwoDimCellSpace* is inherited from the DEVSJAVA class *viewableDigraph*. This class allows for the creation of coupled models that can be graphically viewed in SimView, the DEVSJAVA Simulation Viewer described in Section 5. The *forestCelligniter* is responsible for the initial ignition of the forest by igniting a cell chosen at random (or deterministically) at the beginning of the simulation run and is therefore, connected to the *ForestFireCellSpace*.

The *WindFlowModel* computes the local wind speed and direction given the mean wind speed and direction values from the meteorological station and is also connected to the *ForestFireCellSpace*. This model can generate different wind speeds and direction at scheduled intervals during the simulation. Here we allow the user to enter a mean speed and direction for the entire cell space and the model computes the local wind speed and direction for each cell by sampling from the normal distribution with the given mean and a user selected standard deviation. It should be pointed out here that we are not currently using any wind flow algorithms that take into account the terrain in each forest cell in order to compute the effective wind speed. Nonetheless, if an implementation of such an algorithm is readily available it can be easily incorporated into the *WindFlowModel*.


Similarly, the *FireFightingModel* is an atomic model that is connected to the *ForestFireCellSpace* and allows for rain or pouring of water on cells in the cell space. This model allows fire fighting strategies to be modeled in that we can select cells on which to pour water based on the overall predicted maximum rate and direction of fire spread. For example, in our implementation the model computes a random amount of time it would take for the cell to transition to the corresponding wet state. As mentioned before, this transition delay time is sampled from the exponential distribution with a mean that is selected by the modeler.

The *ForestDisplay* is a two-dimensional graphical display that shows the spread of the forest fire. The following color code is used to represent the state of the cell:

- Green – *unburned*
- Blue – *unburned and wet*
- Pink – *starting to burn*

- Red– *burning*
- Yellow – *burning and wet*
- Gray – *burned and wet*
- Black – *burned*

A forest fire cell atomic model implemented by the *ForestFireCell* class is defined as shown in Figure 7. Each forest cell has eight inputs and eight corresponding outputs for neighbor-to-neighbor couplings.

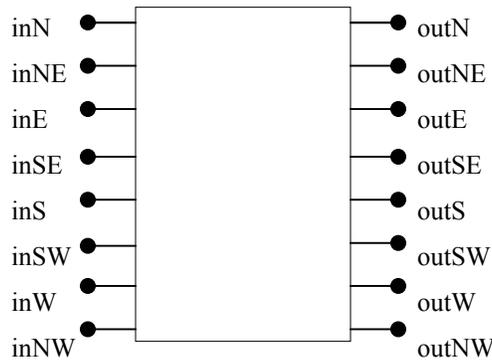

**Figure 7. A forest fire cell atomic model.**

In the two-dimensional implementation of the *TwoDimCellSpace* the  $x$ -dimension ( $xDim$ ) and the  $y$ -dimension ( $yDim$ ) of the cell space must be given before the construction of the cell space. These dimensions give the number of cells along each of the two axes and the total number of cells in the cell space is equal to  $xDim \times yDim$ . The cells are arranged in a 2-dimensional structure from bottom up and each cell is assigned a unique ID. For example, if  $(xDim, yDim) = (5, 4)$  the cells (their IDs shown) are arranged as in Figure 8.

15	16	17	18	19
10	11	12	13	14
5	6	7	8	9
0	1	2	3	4


**Figure 8. Arrangement of cells for a  $5 \times 4$  2-Dimensional cell space**

Also the length ( $l$ ) and breadth ( $b$ ) of the cell must be given and we assume that all cells have the same size. Nonetheless, we can have cells of different sizes in the cell space. It should be pointed

out here that the overall entity structure of the model is modular and allows for any of the component modules to be replaced by whatever the user has available as long as the appropriate messages are passed on to the input and external ports of the model. For example, the Rothermel's fire spread computation model can be replaced with another appropriate model. Similarly one can design a Wind Flow Model that uses specialized algorithms for computing the local wind speed and direction and our model would still work. In the next subsection we give hierarchical diagrams and provide a detailed explanation of the system operation.

### **3.2 Hierarchical diagrams and explanation of operation**

The system structure hierarchical diagram is given in Figure 9. The Cell Space is a coupled model composed of several cell atomic models coupled together according to the neighbor-to-neighbor coupling rules as well as to the input and output ports of the cell space. Except for the boundary cells, each cell is coupled to the adjacent eight neighbors and has access to a fire spread computation model. In our case we use Rothermel's fire spread model. Outside the Cell Space we have the Forest Cell Igniter, Wind Flow and Fire Fighting models with their output ports coupled to the input ports of the Cell Space for receiving external inputs. The Forest Cell Igniter is outside the Cell Space and dictates what cell(s) to ignite in the cell space. The user can select the starting location of the fire by specifying a cell ID in the Forest Cell Igniter model or can have it select a cell at random. The Cell Space Display is simply a GUI that shows the state of each cell in the cell space following the predefined color code scheme given in Section 3.1. The Transducer allows the user to define an experimental frame and choose what parameters output by the Cell Space are of interest for simulation performance analysis and can display the results via the Display model. The Cell Space sends information on the state of the cells to the Transducer whenever a cell makes a transition. For example, one may be interested in computing and displaying the current average rate of spread in the major directions of spread based on the currently burning cells.

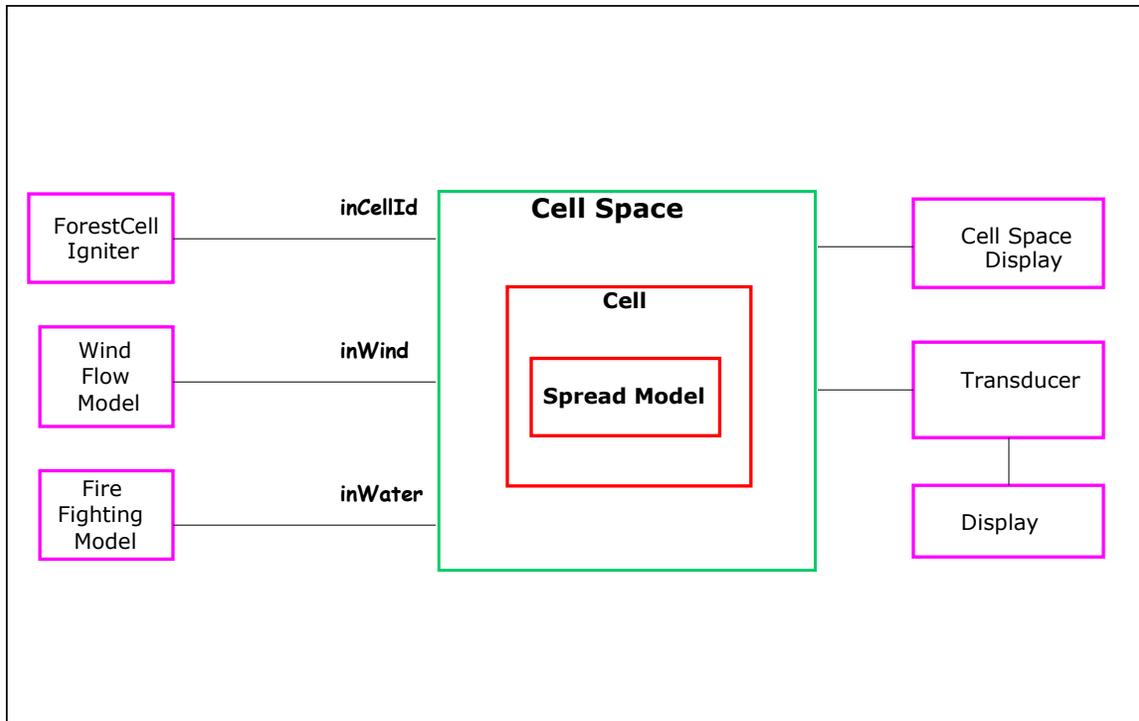

**Figure 9. Forest fire model hierarchical diagram.**

### 3.3 Phase Transitions, Inputs and Outputs of the Forest Cell

The illustration in Figure 2 depicts the states transition for a forest cell. We start the simulation with all the forest cells in the initial state *unburned*. A cell could be ignited either by an *igniter* or by a burning neighbor cell. The transition from *burning* to *burning\_wet* represents a cell that is cooling down with the fire not yet completely extinguished. The cell changes state from *burning\_wet* to *burned\_wet* after some random time determined according the fire suppression rules. These phase transitions are implemented in DEVSJAVA by using the external, confluent, and internal transition functions. An illustration of the operation of these three DEVSJAVA transition functions is given in the Appendix.

When a cell enters the *burning* state, fire spread within the cell is modeled as eight different spread components along the eight directions (Figure 4). At this point, the components start spreading in all the eight directions at individual spreads given by Rothermel's equations, for the given value of wind speed, wind direction and fuel and slope parameters for the cell. For example, if the south-west (SW) spread component reaches the center of the SW neighbor first, then the SW neighbor will potentially be ignited first if the fireline intensity for that cell is above the threshold for the cell's fuel model. As pointed out before, a cell changes state from *burning* to

*burned* when all the eight components have reached the centers of the corresponding neighboring cells. In terms of simulation this means that all the time delay components have been consumed.

Once a cell enters the *burning* phase, the time  $t_i$  for a component in direction  $i$  ( $i = N, NE, E, SE, S, SW, W, \text{ and } NW$ ) to reach the center of the associated neighbor cell is calculated using the simple equation:

$$t_i = \frac{d_i}{R_i}, \quad (1)$$

where,  $d_i$  is the distance from the cell center to the neighbor cell center in the direction  $i$  and  $R_i$  is the rate of spread in the direction  $i$ , which is a component of the maximum rate of spread computed by Rothermel's model. Let us now consider the influence of changes in wind speed and direction on cells in the *burning* phase. Here we simply require that the cell update its rates of spread based on the current weather conditions for the spread components that are still active. Otherwise, no update is made. Let us assume that a spread component  $i$  has covered a distance  $d$  out of a total distance  $d_i$  when new wind speed and direction values are input to the cell. At this point the new spread  $R_i^{new}$  is computed from the maximum rate of spread and direction given by Rothermel's model with current cell weather conditions (wind speed and direction). This allows the model to be dynamic by adapting to changes in weather conditions as the forest fire propagates. The remaining time  $t_i^{new}$  for the component to reach the center of the neighbor cell is now computed over the remaining distance  $d_i - d$  as given in equation (2).


$$t_i^{new} = \frac{d_i - d}{R_i^{new}} \quad (2)$$

The remaining time  $t_i^{new}$  depend on the new rate of fire spread computed based on the current prevailing weather conditions.

#### 4. The Forest Fire Experimental Frame

In order to meet the basic objective of simulating forest fire spread dynamically in an optimized cell space we implemented a forest fire experimental frame as shown in Figure 10. The experimental frame allows us to specify the type of experimentation that would enable us to obtain answers to the questions of interest [20, 21]. The forest fire experimental frame is comprised of the *Transducer*, the cell space display and parameter displays, the *ForestCellIgniter*, the *WindFlowModel* and the *FireFightingModel*. The experimental frame is coupled to the cell space. The external influences on the cell space are initiated by the

experimental frame via the forest cell igniter model, wind flow model and the fire fighting model. The output parameters of interest from the forest cell space are fed to the experimental frame.

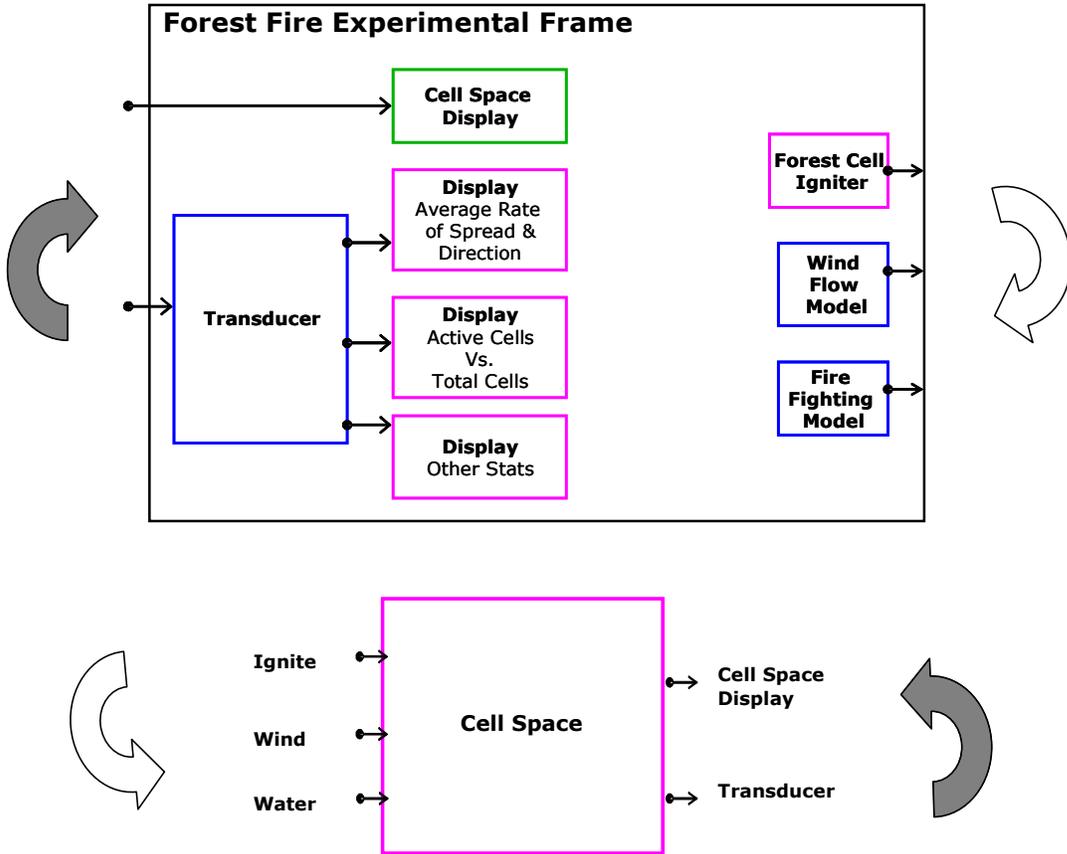

**Figure 10. The forest fire experimental frame**

In the experimental frame the *Transducer* computes the average rate of spread based on the burning forest cells, simulation performance measures and any other measures that may be of interest. The transducer also computes the ratio of active cells to the total number of cells in the cell space and the ratio of active cells to the total number of cells created to analyze cell space optimization performance. Throughout the simulation the cell space display shows the status of the entire cell space in terms of states and provides a tool for analyzing fire spread behavior due to changes in wind speed and direction and the effect of pouring coolant on the forest cells

The computation of the average rate of spread and direction is done as follows. Whenever a cell transitions from *unburned* to *burning* or is in the *burning* state and receives a new wind speed and direction value from the Wind Flow Model it transmits its cell ID, the maximum rate of

spread and direction to the Transducer as an entity implemented as *spreadEnt*. Also, when a cell changes state it sends a notification message to the Transducer. Therefore, the Transducer can compute the average rate of spread and direction based on the cells in the burning state. Let  $n$  be the number of cells currently in the burning state,  $s_{max}^j$  and  $\theta_j$  be the maximum rate of spread and direction for cell  $j$ , respectively. Then the average rate of spread ( $R_{aver}$ ) and direction ( $dir_{aver}$ ) are computed according to equation (3) and equation (4), respectively.

$$R_{aver} = \sum_{j=1}^n s_{max}^j \quad (3)$$

$$dir_{aver} = \sum_{j=1}^n \theta_j \quad (4)$$

The average rate of spread and direction are updated according to the cell transition during the simulation run and give a general rate of spread and direction for the entire cell space.

## 5. Simulation Experiments and Results

To test and validate the operation of our forest fire spread simulation model we conducted several experiments. These experiments were aimed at meeting our initial objective of simulating forest fire spread and suppression under dynamic and non-uniform conditions using the DEVS cellspace approach. The first experiment tests the effect of constant wind speed and direction on fire spreading in homogeneous fuel and slope. The second experiment simulates fire spread in a homogeneous forest under varying wind speed and direction. The third experiment simulates fire spread in a forest with varying fuel models and non-uniform topography. Finally, the fourth and fifth experiment considers suppression by simulating the influence of water or rain (fire fighting) on fire spread behavior. In all the experiments we use a total of 900 (15 meters  $\times$  15 meters) forest cells with a square forest cell space of 30  $\times$  30 cells. To initiate the forest fire we arbitrarily ignite one cell in the cell space in all the experiments. Table 1 gives the name and brief description of each of the 13 NFFL fuel models.

FUEL MODEL DESCRIPTION
NFFL-Fuel-Model 1: short grass (1ft)
NFFL-Fuel-Model 2: Timber (grass and understory)
NFFL-Fuel-Model 3: Tall grass (2.5 ft)
NFFL-Fuel-Model 4: chaparral
NFFL-Fuel-Model 5: Brush (2 ft)
NFFL-Fuel-Model 6: Dormant brush, hardwood slash
NFFL-Fuel-Model 7: Southern rough
NFFL-Fuel-Model 8: Closed timber litter
NFFL-Fuel-Model 9: Hardwood litter
NFFL-Fuel-Model 10: Timber (litter and understory)
NFFL-Fuel-Model 11: Light logging slash
NFFL-Fuel-Model 12: Medium logging slash
NFFL-Fuel-Model 13: Heavy logging slash

**Table 1. The 13 NFFL Fuel models.**

All the experiments were conducted on a 1.8GHz PC with 256MB RAM running DEVSJAVA with SimView DEVSJAVA Simulation Viewer Version 1.0.4. SimView allows the experimenter to view all the simulation models with input and output ports together with the corresponding couplings among the various models. Furthermore, SimView has a number of convenient functionalities such as allowing the user to stop and start the simulation at any time during a simulation run, fast-forwarding or slowing down the simulation, and being able to input the appropriate parameters into any model by simply clicking on a models input port and selecting the desired option from a popup menu. Also, the inherent parameters of a model can be viewed on a popup menu by simply positioning the cursor on the model. Figure 11 gives a picture of SimView window with some of the forest fire simulation model components shown. To run a given simulation model the user simply needs to select the appropriate model from a menu bar and then click run. The simulation clock is also shown on the SimView window.


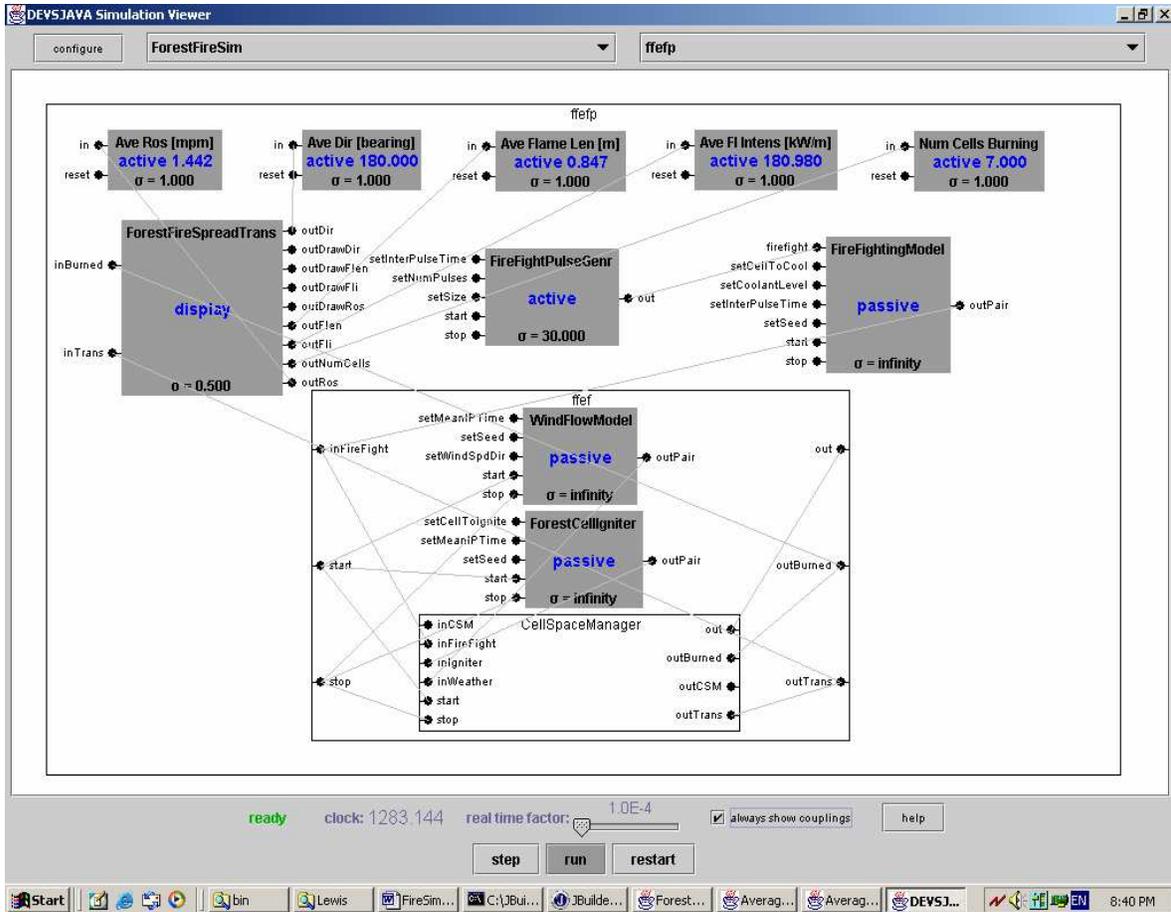


Figure 11. An example appearance of SimView window

## 5.1 Experiments


Our experiments were conducted on the standard fuel models NFFL-4 (chaparral), NFFL-7 (southern rough), and NFFL-11 (light logging slash). These fuel models were arbitrarily chosen for their differences in fuel loadings and they exhibit varied fire spread behaviors. We first conducted preliminary experiments to study the effect of extreme wind speed conditions and extreme terrain conditions, respectively, on the rate of spread. The results of these experiments are given in Figure 12 and 13. To study the effect of extreme wind speed conditions on fire spread we set the slope to zero and had the wind blow northwards and then varied wind speed from 0 m/s to 10 m/s. As shown in Figure 12 the rate of spread increases as expected with increase in wind speed for the three fuel models. The rate of spread in NFFL-4 is highest followed by NFFL-7 and NFFL-11, in that order. Indeed, the rates of spread we obtained for NFFL-4 fall within 10% of the rates of spread reported by [22, 23] who extensively studies fire spread in NFFL-4 and *ceanothus* chaparral and uses a continuous-based simulation software

called HFire (Highly Optimized Tolerance Fire Spread Model). HFire is a new raster-based spatially explicit model of surface fire spread through Southern California chaparral written in the C programming language. The results obtained with HFire are compatible with field measurements and observations made for the validation of HFire and are thus usable for the validation of our model.

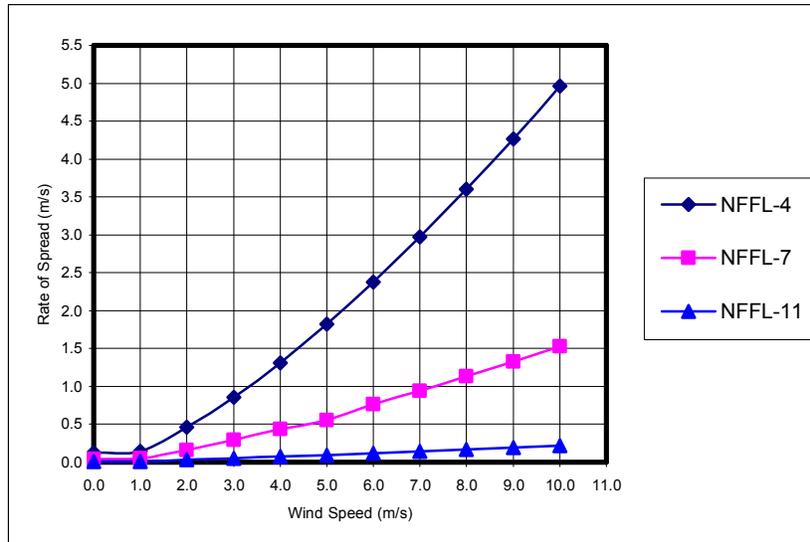

**Figure 12. Rate of spread for varying wind speed conditions**


To study the effect of extreme terrain conditions on fire spread we set the wind speed to zero and varied the slope (rise/run) from 0 to 1. The results (Figure 13) show that the rates of spread in all the three fuel models increase with rise in slope. The rate of increase is highest in NFFL-4 followed by NFFL-7 and NFFL-11, in that order. In this case also the results obtained for NFFL-4 are within 10% of those reported by [22, 23] for all the points on the graph. The rate of spread results for NFFL-4 under extreme wind and slope conditions, respectively, are in close agreement with those observed, simulated and reported in [22, 23]. We were unable to find rate of spread results in the literature for the other two NFFL models under the described or similar experimental conditions. Next we report on the results obtained from five different fire spread experiments to test the operation of our simulation model.

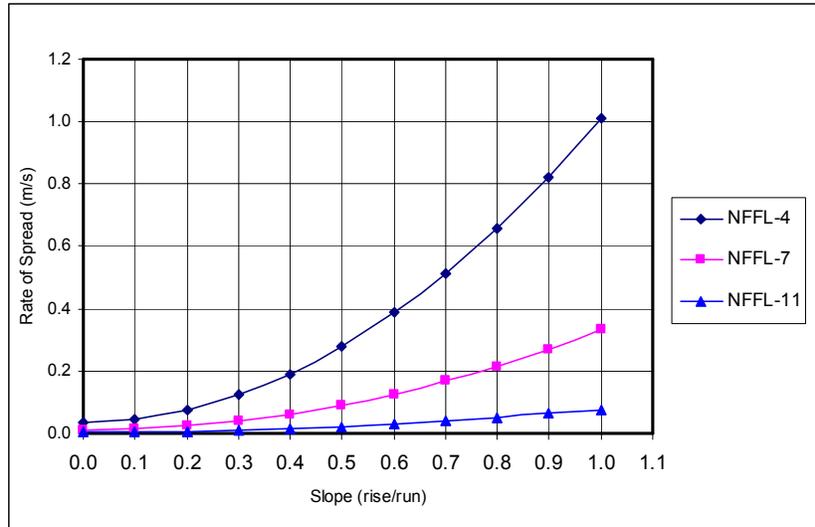

**Figure 13. Rate of spread for varying terrain conditions**

### 5.1.1 Experiment 1 – Fire Spread under Constant Wind Speed and Direction

In this experiment the wind speed was arbitrarily fixed at 8.048kmh or 2.2352 meters per second (m/s) and the corresponding wind direction fixed at 0 degrees or north. In all the experiments all the parameters were taken as deterministic and no sampling from any probability distribution was done for lack of information on the appropriate probability distributions to use. In this experiment the terrain slope was fixed at zero while the forest fuel model NFFL-4 (chaparral) was used for all the forest cells. We did not adopt the standard meteorological definition for wind direction, which has the convention that wind direction is the direction where the wind is blowing “from”. Instead, we state wind direction as the direction where the wind is blowing “to”. Figure 14 gives the fire propagation results of the simulation with the simulation clock given for each diagram. The first diagram shows the initial fire ignition point.

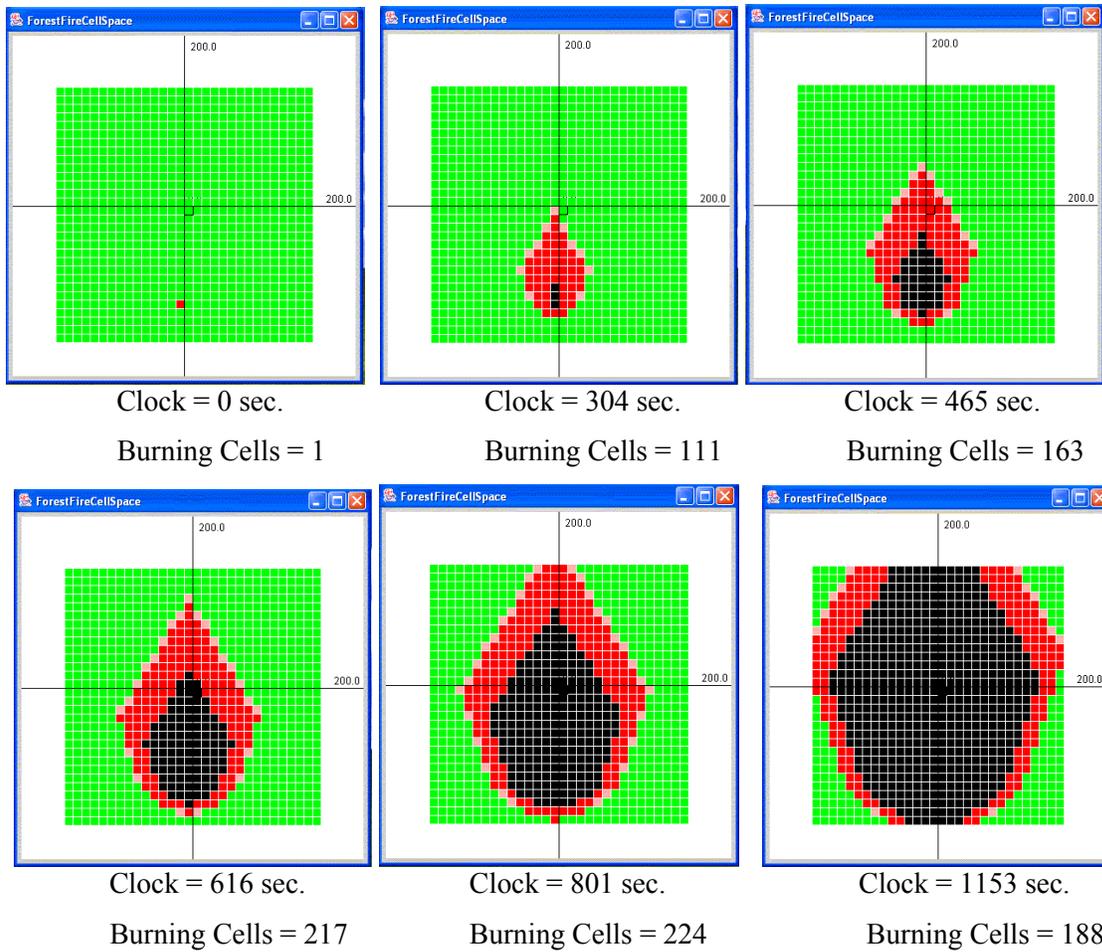

**Figure 14. Fire propagation results for Experiment 1: constant wind speed and direction**

In the diagrams unburned cells are shown in green, burning cells in red, and burned cells in black. The forest cells that are just starting to burn are shown in pink or light red. As can be seen the in diagrams the fire spreads faster northwards, along the direction of wind flow, and slower southwards. The average parameters for this experiment as computed by the simulation transducer model are given in Table 2. The rate of spread, flame length and fireline intensity are fairly high for this fuel model.


Rate of Spread <i>m/s</i>	Direction <i>Bearing</i>	Flame Length <i>m</i>	Fireline Intensity <i>kW/m</i>
0.5459	0.000	7.5811	21233.7218


**Table 2. The average spread parameter values for Experiment 1**

These values remain constant throughout the simulation due to the uniformity of the cell vegetation and environmental conditions across all cells. Again the rate of spread under these conditions is comparable to that obtained by [22] using the HFire simulation.

### 5.1.2 Experiment 2 – Varying Wind Speed and Direction

In this experiment the terrain slope was also fixed at zero while the forest fuel model NFFL-4 (chaparral) was used for all the cells. The wind speed and direction were varied two times during the experiment. The experiment was initiated with a wind speed of 4.0233 kmh (1.1176 m/s) in the direction 0 degrees (N) and then changed to a wind speed of 8.048 kmh (2.2352 m/s) in the direction 45 degrees (NE) at simulation clock 1100 seconds. The evolution of the fire is given in Figure 15.

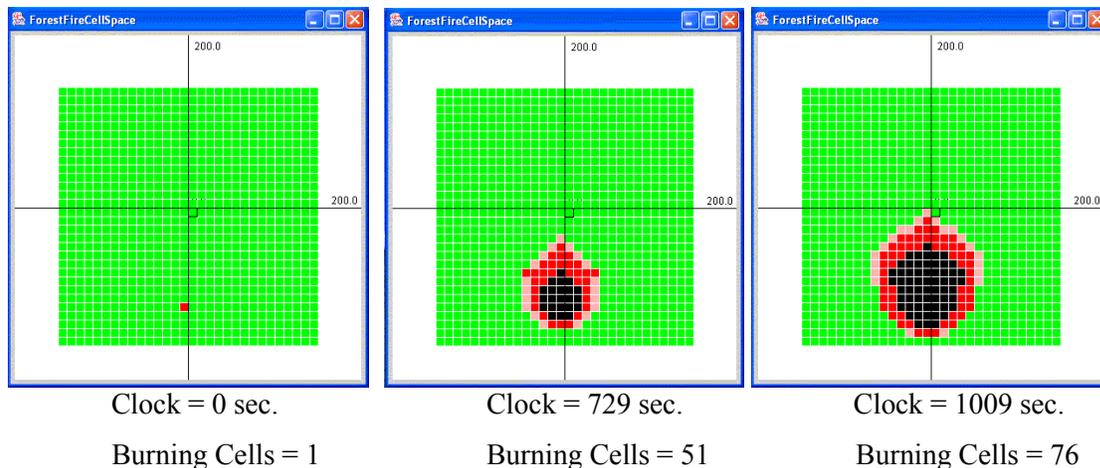

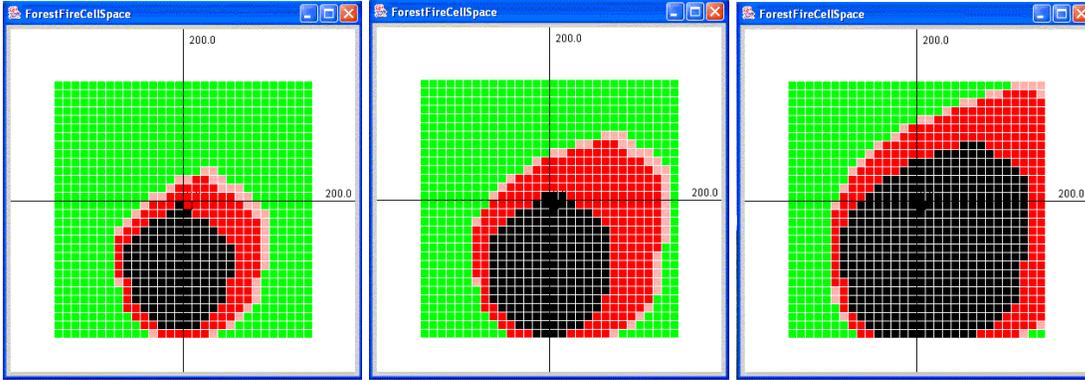

Clock = 1157 sec.

Burning Cells = 142

Clock = 1462 sec.

Burning Cells = 258

Clock = 2003 sec.

Burning Cells = 226

**Figure 15. Fire propagation results for Experiment 2: varying wind speed and direction**

The fire initially spreads northward at a slower pace and picks up speed after 1100 seconds and changes course heading towards the NE as influenced by the dynamic change in wind direction. With an increase in wind speed we see more cells catching fire in the new wind direction. The average spread parameters for this experiment are given in Table 3.

Clock <i>seconds</i>	Rate of Spread <i>m/s</i>	Direction <i>Bearing</i>	Flame Length <i>m</i>	Fireline Intensity <i>kW/m</i>
729	0.1715	0	4.4506	6670.4770
1009	0.1715	0	4.4506	6670.4770
1157	0.3819	26.9009	6.1789	14856.7053
1462	0.5376	44.7916	7.4568	20909.6636
2003	0.5363	45.5222	7.4418	20816.7741

**Table 3. The average spread parameter values for Experiment 2**


There is an increase in the rate of spread, flame length and fireline intensity corresponding to the increase in wind speed. Similarly, we see a change in the spread direction from 0 degrees going about 45 degrees (NE). These results demonstrate how the simulation model adapts to a dynamic change in weather conditions (wind speed and direction).

### 5.1.3 Experiment 3 – Fire Spread in a Non-Uniform Forest (Across a Valley)

In this experiment we simulate fire behavior across a valley in a forest composed of three different fuel models and varying topography as shown in Figure 16 and 17. Each block in the forest is a  $10 \times 30$  cell space composed of 300 forest cells and the NFFL fuel model number and slope are shown in each block. In the graphical display (Figure 18) the three fuel models are represented by the different shades of green.

NFFL Fuel Model 7: Southern Rough Slope: 10 % Aspect: 180 Degrees	N  Wind
NFFL Fuel Model 4: Chaparral Slope: 0 %	
NFFL Fuel Model 11: Light Logging Slash Slope: 15 % Aspect: 0 Degrees	


**Figure 16. Forest cell space with non-uniform parameters**

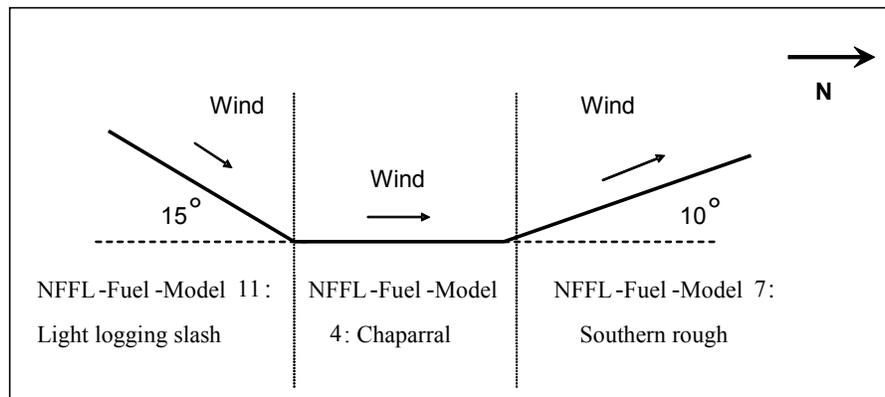

**Figure 17. Forest Terrain with non-uniform parameters**

Here our goal is to simulate a fire that crosses a valley that lies E-W from the south towards the north. The wind blows northward down the declining side of the valley, then the flat portion of the valley, and finally blows uphill. The wind speed and direction for this experiment were kept

as in the first experiment at 8.048kmh (2.2352 m/s) in the north direction (0 degrees). The evolution of the fire is shown in Figure 18.

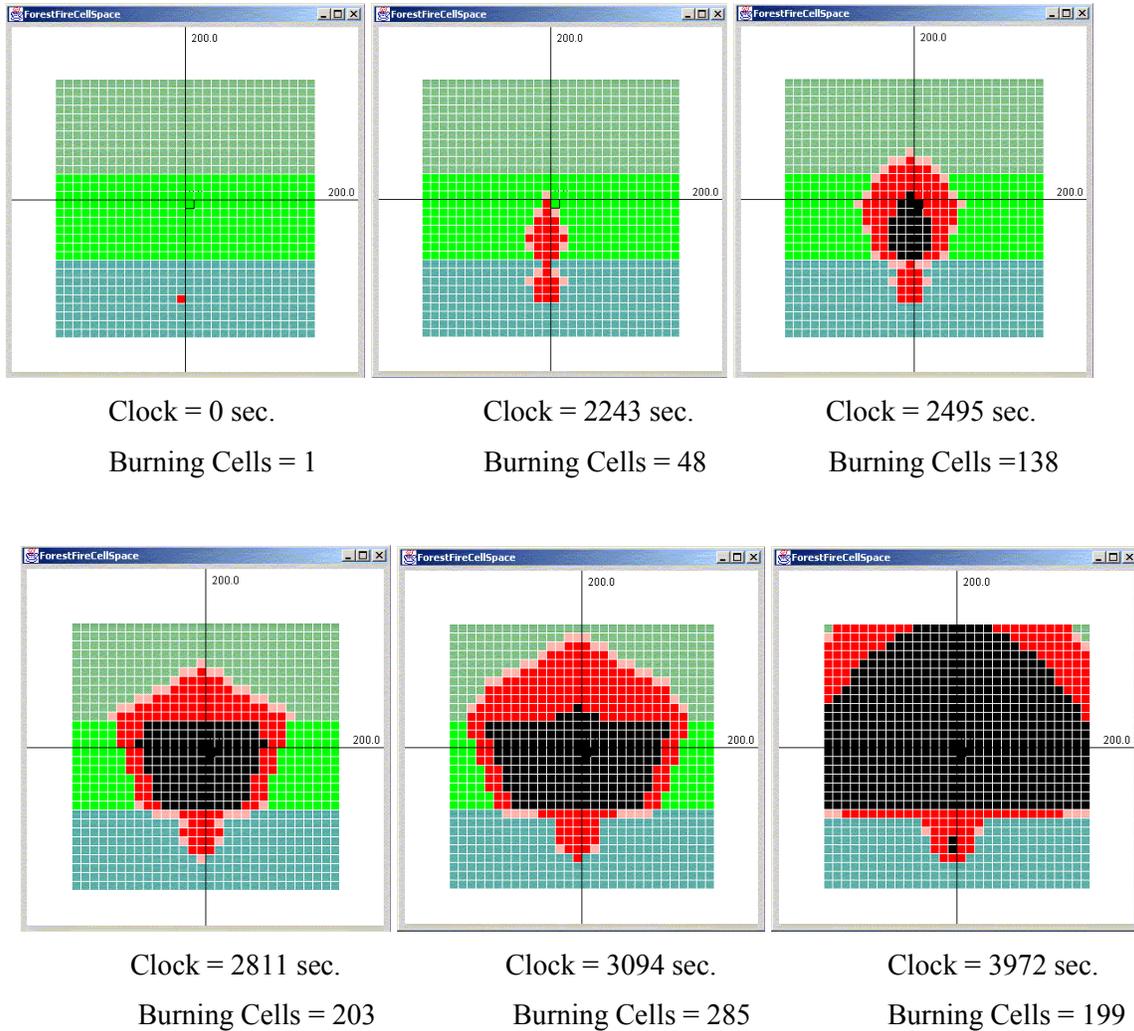

**Figure 18. Fire propagation results for Experiment 3: a non-uniform forest cell space**

First the fire propagates down the slope through NFFL-11 (light logging slash) to the bottom section of the forest with NFFL-4 (chaparral), where it starts spreading sideways. Meanwhile the fire steadily climbs up the top section of the forest through NFFL-7 (southern rough) where it picks up the pace and spreads across the entire section. Here we see the fire spreading quickly in the second section to catch fire and then the last. This is because the middle section has the fuel model with the highest fuel load while the last section has a high fuel load model coupled with wind in the uphill direction. Fire spread is slowest in the first section with the intermediate load

fuel type and where the wind blows downhill. Indeed this is what should be expected, a slow backing fire in an intermediate fuel type, faster fire spread in the heavier fuel load model, and intermediate situation. The average spread parameters for this experiment are given in Table 4.


Clock <i>seconds</i>	Rate of Spread <i>m/s</i>	Direction <i>Bearing</i>	Flame Length <i>m</i>	Fireline Intensity <i>kW/m</i>
2243	0.3655	0.000	5.3214	13850.3904
2495	0.4253	0.000	5.9635	15695.7804
2811	0.3069	0.000	4.1796	9162.1884
3094	0.2631	0.000	3.4875	6563.9373
3972	0.2089	0.000	2.8509	4582.9365

**Table 4. The average spread parameter values for Experiment 3**

These results show an increase in the values and then a decrease towards the end. This corresponds to the fire spreading across the three different fuel models under different terrain conditions coupled with limited burnable space. Again our simulation model demonstrates the capability of simulating fire spread under non-uniform terrain conditions.

#### **5.1.4 Experiment 4 – Fire Spread Under the Influence of Water in a Uniform Forest**

The fourth experiment tests the influence of water or rain on fire spread behavior. In this experiment the wind speed and direction were again set at 8.048kmh (2.2352 m/s) in the north direction (0 degrees). The forest fuel model NFFL-4 (chaparral) was used. We considered a fire fighting scenario where water is poured on the forest cells from north to south against the major spread direction at 0.2679 m/s. Here we allow cells to transition from a dry state to a wet state according to the fire fighting rules defined in Section 2.3. We arbitrarily sample from the uniform distribution with  $\alpha_1 = \text{uniform}(0, 0.5)$  and  $\alpha_2 = \text{uniform}(0.5, 1.0)$  for the first and second cases of the fire suppression rules, respectively. Figure 19 shows the experimental results.

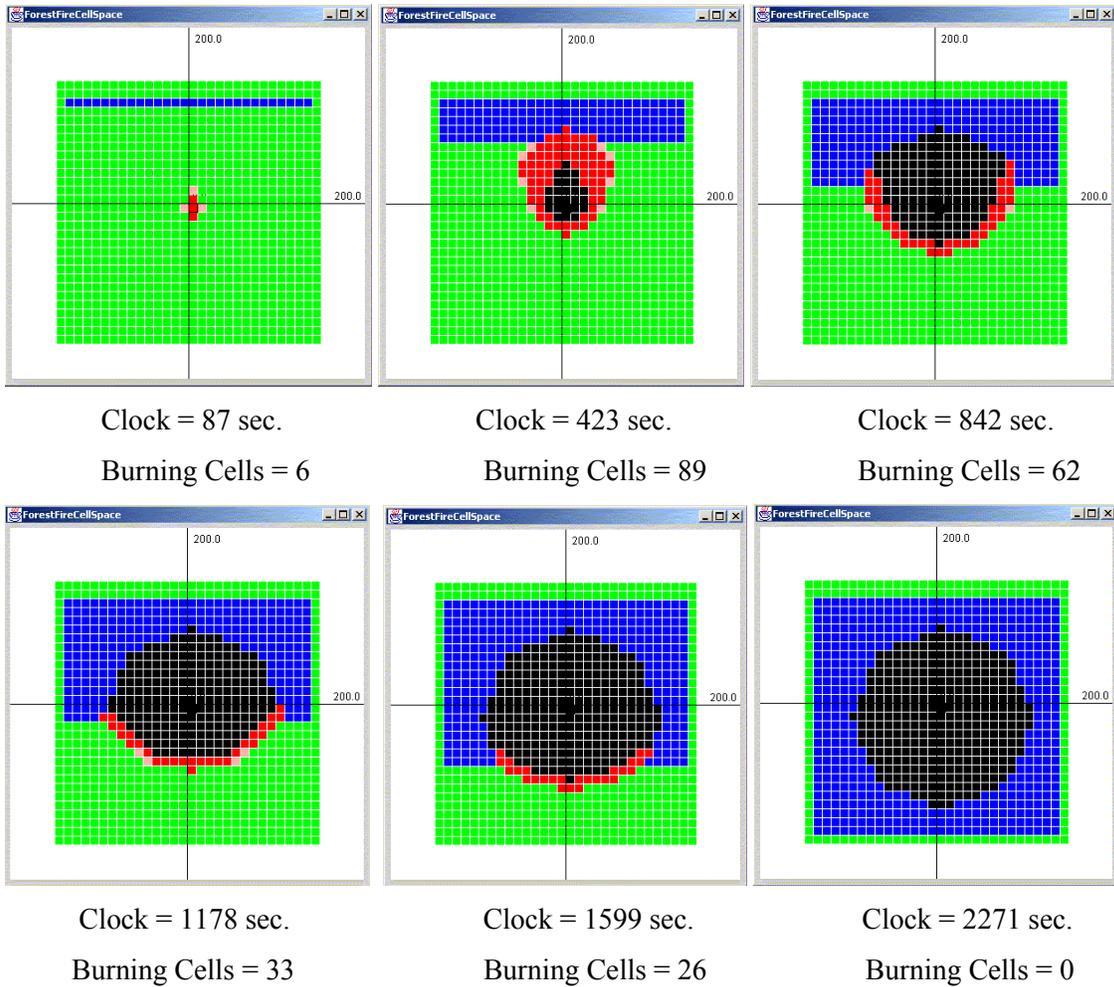


**Figure 19. Fire spread under the influence of water**

Here we see how a fire is attacked head on by water (or rain) and the unburned cells transition to blue (*unburned and wet*) and never catch fire. In this scenario the fire cannot be put off by pouring water on the burning cells and the burning cells change color from red to black after burning. This is because the fuel model NFFL-4 is high in fuel and the flame lengths are well above 2.4 meters and are as high as 7.5811 meters (see Table 2). According to our fire suppression rules such a fire cannot be contained by any direct attack means. Thus by pouring water on cells before they catch fire we are able to contain the fire.

### 5.1.4 Experiment 5 – Fire Spread Under the Influence of Water in a Non-Uniform Forest

The final experiment tests the influence of water or rain on fire spread behavior in a non-uniform forest described in Experiment 3. As in the previous experiment, the wind speed and direction were set at 8.048kmh (2.2352 m/s) in the north direction (0 degrees) and we consider a fire fighting scenario where water is poured on the forest from north to south against the major spread direction at 0.2679 m/s. Again we set  $\alpha_1 = \text{uniform} (0, 0.5)$  and  $\alpha_2 = \text{uniform} (0.5, 1.0)$ . The experimental results are shown Figure 20.

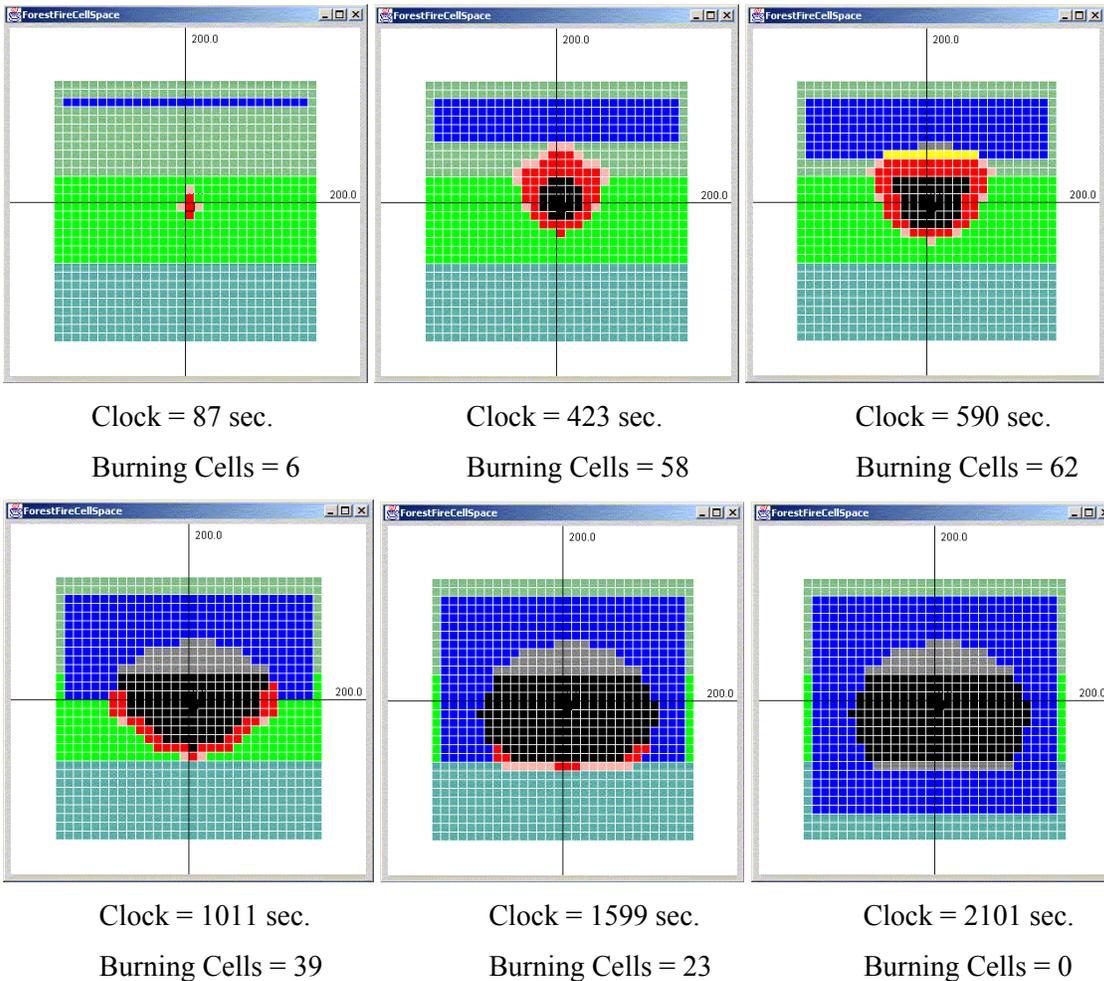

**Figure 20. Fire propagation results for Experiment 5: influence of water or rain on fire spread in a non-uniform forest**

Unlike the previous experiment with the same fuel model with flame lengths well over 2.4 meters, here we see fire being put out in upper and lower section fuel models but not the middle one. The middle fuel model (NFFL-4) has flame length greater than 2.4m as shown in the previous experiment and the fire cannot be put out by control efforts at the head of the fire. However, indirect attack (cooling the forest cells before the catch fire) seems to be the only means of suppression. The upper and lower section fuel models NFFL-11 and NFFL-7 have flame lengths well below 2.4m and thus the fire is contained by pouring water on the cells. In this experiment we see how the simulation model can provide a platform for experimenting with different fire suppression rules.

### 5.1.5 Simulation Efficiency Parameters

Finally, in Table 5 we give the ratio of total active cells (burning cells) to the total number of cells in the cell space for all the experiments. The first column of Table 5 shows the plate number corresponding to the figure shown in the fire evolution results in Figures 14-20. The rest of the columns show the ratios for each experiment. The ratios are generally very small, an indication that very few cells are active (actually burning) at any point in time during the simulation. In fact the results show that only less than 32% of the cells in the cell space are actually active at any point in time. The importance of these ratios in discrete event simulation is that they are a factor in determining simulation efficiency since they are a strong indication of the average number of *imminents*. The simulation engine used in our simulation model takes advantage of the small number of *imminents* to decrease simulation time significantly.

Plate No.	EXPT 1	EXPT 2	EXPT 3	EXPT 4	EXPT 5
1	0.0011	0.0011	0.0011	0.0067	0.0067
2	0.1233	0.0567	0.0533	0.0989	0.0644
3	0.1811	0.0844	0.1533	0.0689	0.0689
4	0.2411	0.1578	0.2256	0.0367	0.0433
5	0.2489	0.2867	0.3167	0.0289	0.0256
6	0.2089	0.2511	0.2211	0.0000	0.0000

**Table 5. Ratio of number of burning cells to total cells in the cell space**

We should also mention that simulating larger cell spaces (with over 1000 cells) resulted in memory problems for the computer platform we used. This is because we create and instantiate all the cells in the cell space all at once before starting the simulation. To avoid memory problems one can consider dynamic creation and removal of cells from the cell space since only a small

fraction of cells are needed at any point in time during the simulation. However, this may have an impact on the simulation speed due to the time needed to instantiate and create cell neighbor-to-neighbor couplings. Also, one can resort to a distributed simulation implementation. We leave these avenues for our future research due to the implementation issues associated with these approaches.

## **6. Discussion and Conclusions**

In this paper we have presented the conceptualization, modeling and simulation of forest fire spread and suppression using the DEVS cellspace approach. The event-based modeling approach enables efficient simulation especially for the cell space application considered in this paper. Realizing the fact that in fire spread simulation, computations are concentrated along the fire front, we adopt an approach in which, at a given instant, only cells that correspond to burning zones are active in DEVS cellspace. Also our model considers non-uniform fire spread parameters in order to address the issue of spatial/temporal variability of the forest fire spread variables and allows computation and message exchanges to occur only in active cells. The model dynamically predicts average fire spread as the fire propagates and adapts to changes in wind speed and direction.

The domain of validity of Rothermel model is determined by its assumptions and is described in the literature [11, 12]. The domain is, strictly speaking, for steady state, surface fires under homogeneous conditions in space and in time (fuel, weather and topography); conditions for which the model has been validated [24, 25]. By letting each cellular region in space have its specific parameters, the conditions of spatial homogeneity are met within each cell. Moreover, since the calculations are performed based on a discrete event systems specification, there is homogeneity of parameters between events. Consequently, the calculations performed within each piece-wise constant portion of our calculation space are valid. Furthermore, we assume that once a cell is ignited, it reaches the steady-state conditions of Rothermel model in a manner that employs external events to account for the effects of its neighbors.

To validate a model based on this piecewise constant space/time approach, we must compare its predictions with reality or with the results of validated process based models. Comparisons with real fire data first appeared in [26], where predictions were compared with the behavior of one real forest fire, and an agreement within ten percent was found. In the work presented here, we conducted several more experiments and the results matched our expectations as well as those in the literature. In particular, the rate of spread results for NFFL-4 under increasingly severe

wind and slope conditions, respectively, are very similar to what is reported in the literature for field observations. Some limitations of the approach however are to be expected. Rothermel's model is designed for surface fires, and thus when a transition to large fire behavior occurs, the assumptions of Rothermel model are no longer met, and the rates of spread calculated within each cell may no longer be valid.

The work presented indicates that the model has potential for providing essential information needed in tactical decision making for effective forest fire suppression and control.

Our future work includes the extension of the current forest fire spread simulation model to support real-time or as-fast-as-can tactical decision making for fire control and suppression. In particular we plan on extending the current forest cell atomic model into a coupled model that will allow for the addition of "agents" to the simulation model. By "agents" we mean something that can act on the fire spread so as to control it, such as firefighting equipment or indeed firefighters. Furthermore, we plan on incorporating fire spread models other than the Rothermel model that consider fire spread under non-uniform conditions and account for back-burning, spotting and crowning.

Finally, we plan on implementing the simulation model in a distributed setting. This would allow for simulations with a large number of cells or simulations with different geographically spaced forest cells to be implemented much more efficiently. Simulations that allow for large number of cells mean that the forest cell space can be represented with much smaller size cells and would result in more accuracy in the representation of the forest fire model input parameters. Nevertheless, the forest cell size also depends on the fire spread model being used. Finally, validation of the models must be performed for particular forest applications by testing its predictions with those of observed or prescribed forest fire events.

## References

- [1] Andrews, P.L. and L.P. Queen, [2001], Fire modeling and information system technology. *International Journal of Wildland Fire*, 10, pp. 343-352.
- [2] Zeigler B. P., H. Praehofer, and T.G. Kim [2000], *Theory of modeling and simulation*, 2<sup>nd</sup> Edition, Academic Press.
- [3] Wainer, G. and N. Giambiasi [2001], "Timed Cell-DEVS: modeling and simulation of cell spaces", In *Discrete Event Modeling & Simulation: Enabling Future Technologies*, Springer-Verlag, pp. 187-213.

- [4] Zeigler, B.P., [2003], Discrete Event Abstraction: An Emerging Paradigm for Modeling Complex Adaptive Systems, *Advances in Adaptive Complex Systems*, edited by L. Booker, Sante Fe Institute/Oxford Press, Oxford (in press).
- [5] Ameghino J., A. Troccoli, G. Wainer [2001], Models of complex physical systems using Cell-DEVS. *Proceedings of Annual Simulation Symposium*. Seattle, WA. U.S.A.
- [6] Muzy, A., G. Wainer, E. Innocenti, A. and Aiello, J.F. Santucci [2002]. Comparing simulation methods for fire spreading across a fuel bed. *Proceedings of AIS'2002*, Lisbon, Portugal.
- [7] X. Hu, and B. P. Zeigler [2004], "A High performance simulation engine for large-scale cellular DEVS models," accepted by *High Performance Computing Symposium (HPC'04)*, *Advanced Simulation Technologies Conference*.
- [8] Zeigler B. P. and H. Sarjoughian [2002], *Introduction to DEVS Modeling and Simulation with JAVA: A Simplified Approach to HLA-Compliant Distributed Simulations*, The University of Arizona, Tucson, Arizona, USA, <http://www.acims.arizona.edu>.
- [9] Muzy, A., E. Innocenti, J.F. Santucci and D.R.C. Hill [2003]. Optimization of Cell Spaces Simulation for the Modeling of Fire Spreading. *Proceedings of the 36th Annual Simulation Symposium*, Orlando, Florida, pp.289-296.
- [10] Vasconcelos, J. M. [1993], *Modeling Spatial Dynamic Ecological Processes with DEVS-Scheme and Geographical Information Systems*, Ph.D. Dissertation, Dept. of Renewable and Natural Resources, University of Arizona, Tucson, U.S.A.
- [11] Rothermel, R. [1972], A mathematical model for predicting fire spread in wildland fuels. Research Paper INT-115. Ogden, UT: U.S. Department of Agriculture, Forest Service, Intermountain Forest and Range Experiment Station.
- [12] Andrews, P.L. [1986], BEHAVE: Fire behavior predictions and fuel modeling system-BURN subsystem part 1. USDA For. Service General Technical Report INT-194. 130 p.
- [13] Anderson, H.E. [1983], Predicting wind-driven fire size and shape. USDA-FS, Ogden UT, Research Paper INT-305.
- [14] Alexander, M.E. [1985], Estimating the length-to-breadth ratio of elliptical forest fire patterns. *Proceedings of the eighth conference on fire and forest meteorology*, Soc. Am. For., pp. 287-304, Bethesda, Maryland.
- [15] Nelson, R. M. Jr. [2002], An effective wind speed for models of fire spread, *International Journal of Wildland Fire*, 11, pp.153 - 161.
- [16] Byram, G.M. [1959], Combustion of forest fuels. *Forest Fire: Control and Use*, edited by K.P. Davis, McGraw-Hill, New York, pp. 113-126.

- [17] Albini, F.A., [1976], *Estimating Wildfire Behavior and Effects*, General Technical Report INT-30, USDA Forest Service, Intermountain Forest and Range Experiment Station.
- [18] Miller, C. and D.L. Urban [1999], Forest pattern, fire, and climatic change in the Sierra Nevada. *Ecosystems* 2, pp.76-87.
- [19] Rothermel, R.C., G.C. Rinehard [1983], Field procedures for verification and adjustment of fire behavior predictions. *USDA Forest Service General Technical Report INT-142*. Intermountain Forest and Range Experiment Station, Ogden, UT.
- [20] Zeigler, B.P. [1984], *Multifaceted Modelling and Discrete Event Simulation*. London, Academic Press.
- [21] Zeigler, B.P. [1990], *Object-oriented simulation with hierarchical, modular models: intelligent analysis and endomorphic systems*, Boston, Academic Press, pp. 89-90.
- [22] Morais, M. [2001], Modeling fire behavior in chaparral with HFire, [http://www.physics.ucsb.edu/~complex/research/hfire/fbehave/refs/morais\\_2001\\_hfire\\_pres.pdf](http://www.physics.ucsb.edu/~complex/research/hfire/fbehave/refs/morais_2001_hfire_pres.pdf).
- [23] Morais, M. [2001], *Comparing spatially explicit models of fire spread through chaparral fuels: A new model based upon the Rothermel fire spread equation*, MA Thesis, University of California, Santa Barbara.
- [24] Sneeuwjagt, R. J., And Frandsen, W. H. [1977], Behavior of experimental grass fires vs. predictions based on Rothermel's fire model. *Canadian Journal of Forest Research*, 7, 357-367.
- [25] Wilgen, B.W.V., Maitre, D.C.L., And Kruger, F.J. [1985], Fire behavior in South African Fynbos (Macchia) vegetation and prediction from Rothermel's fire model, *Journal of Applied Ecology*. 22:207-216.
- [26] Vasconcelos, J. M., B.P. Zeigler and J. Pereira [1995], Simulation of fire growth in GIS using discrete event hierarchical modular models, *Advances in Remote Sensing*, Vol. 4, No. 3, pp. 54-62.

## APPENDIX

### Transition Functions and Illustrative DEVSJAVA code

In this appendix we give an illustration of DEVSJAVA code by highlighting the operation of the external, confluent, and internal transition functions.

### External Transition Function

Figure 19 gives an illustration of the external transition function with the DEVJSJAVA illustrative code given describing the operation of the external transition function. A cell transitions into another state if the external input message satisfies a given condition.


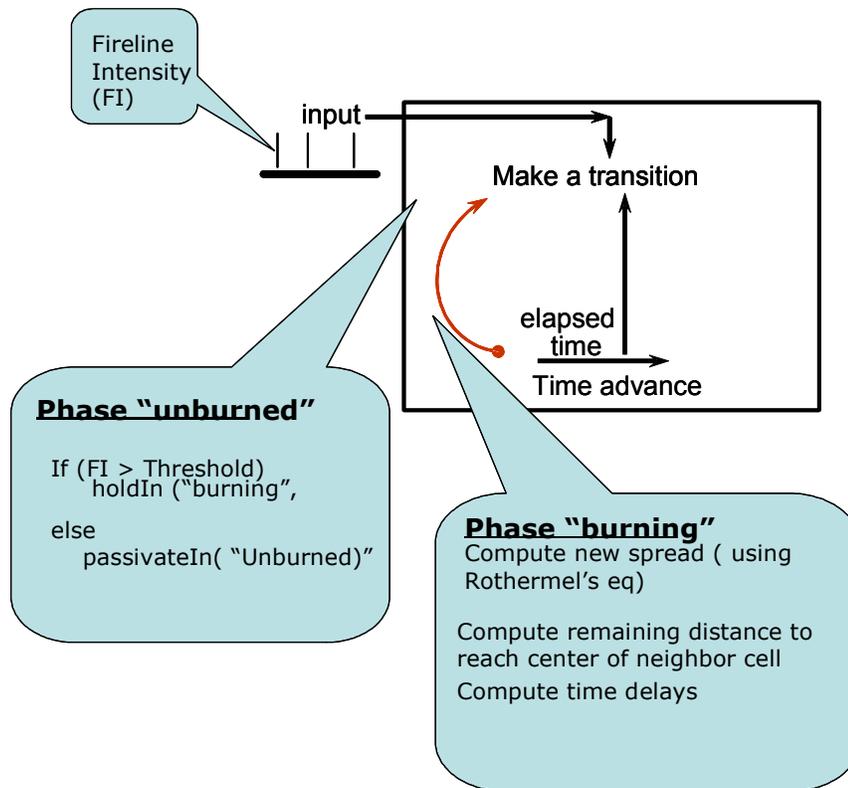


Figure 19. External Transition Function.

### Internal Transition Function


A diagrammatic description of the internal transition function is given in Figure 20. A cell outputs a message to the neighbor cell if the corresponding spread component reaches the center of the neighbor cell.

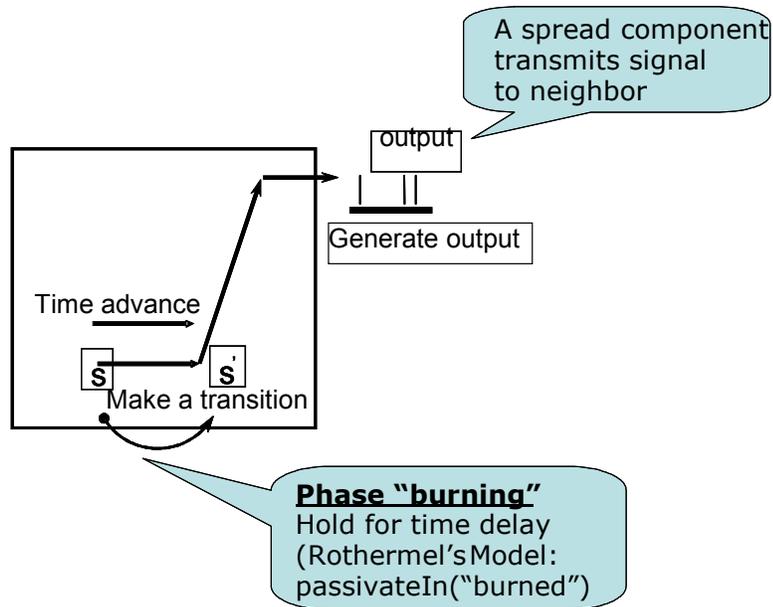

**Figure 20. Internal Transition Function.**

### **Confluent Transition Function**

Figure 21 gives an illustration of the confluent transition function. The confluent transition function decides the function to execute when an input arrives at the port of the cell atomic model when a spread component is imminent. In our simulation model the confluent function gives preference to the internal transition function over the external transition function. That is, we first output the message and then process the input message.

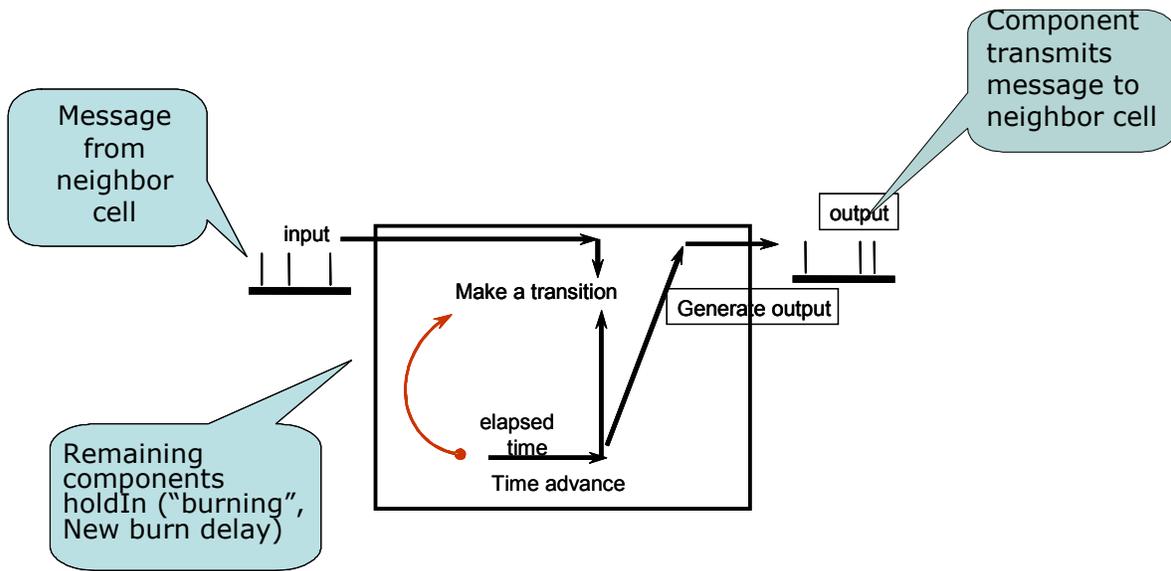

**Figure 21. Confluent Transition Function.**

As shown in Figure 21 an input arrives when a spread component is imminent, that is, when its time delay is just becoming zero. Thus the component will transmit a signal to the neighbor cell associated with the component before the cell atomic model processes the input message: re-computing the rate of spread in all the remaining spread directions and thus the new time delays are set as described in the external transition function.